

热敏纸产品标准(Thermal Paper Specifications)


TPA 048 (BP Free)

Item			48g/m ²	Method	
定量 Base Weight		g/m ²	48±4	ISO 536	
厚度 Caliper		μm	56±5	ISO 534	
白度 Brightness		% ISO	≥80	ISO 2470	
粗糙度 Roughness		μm	≤2.5	ISO 8791	
抗张强度 Tensile Strength		MD	kgf/15mm	≥2.0	ISO 1924
发色性能 Image Property	静发色 Static Image	70℃	O.D	≤0.25	GB/T 28210
		Maximum density	O.D	≥1.00	
	动发色 Dynamic Image	Dynamic sensitivity	mj/mm ²	≤9.0	GB/T 28210
		Maximum density	O.D	≥1.10	
保存性能 Durability	耐湿 Humidity Resistance	Back ground	O.D	≤0.25	40℃ • 90%RH • 24h
		Printed part	O.D	≥0.80	
	耐热 Heat Resistance	Back ground	O.D	≤0.25	60℃dry • 24h
		Printed part	O.D	≥0.80	
	耐光 Light Resistance	Back ground	O.D	≤0.25	SUNTEST • 1h
		Printed part	O.D	≥0.80	


★ 保存环境：温度18~25℃，湿度40~60%RH，避光、避免接触水及增塑剂、油、溶剂、胶黏剂、酒精…等化学物质。

★ Stored Conditions: room temperature between 18~25°C, relative humidity between 40~60%RH, avoid light, water, and chemicals like plasticizers, oil, grease, alcohol, organic solvent...etc.

DYNAMIC SENSITIVITY

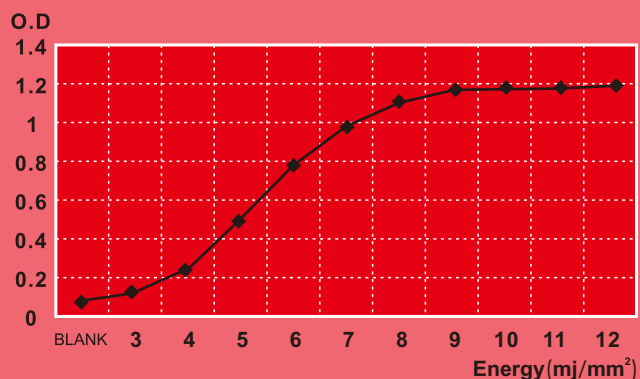

STATIC SENSITIVITY

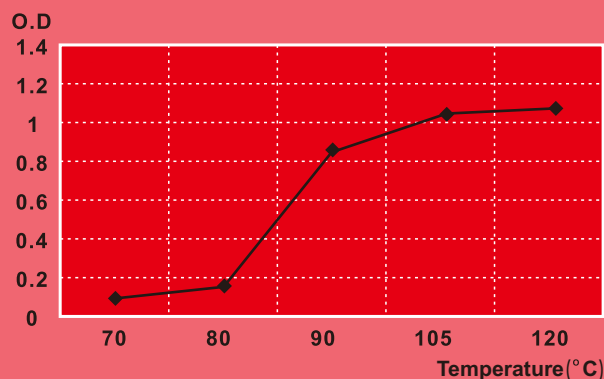

金东纸业(江苏)股份有限公司
GOLD EAST PAPER(JIANGSU) CO.,LTD.

服务热线: 4008293768

地址: 江苏省镇江市大港兴港东路8号 邮编: 212132

Add: No.8 Xing Gang Dong Road,Dagang Zhenjiang City,Jiangsu

网址 Web: www.app.com.cn